


Fine Screen

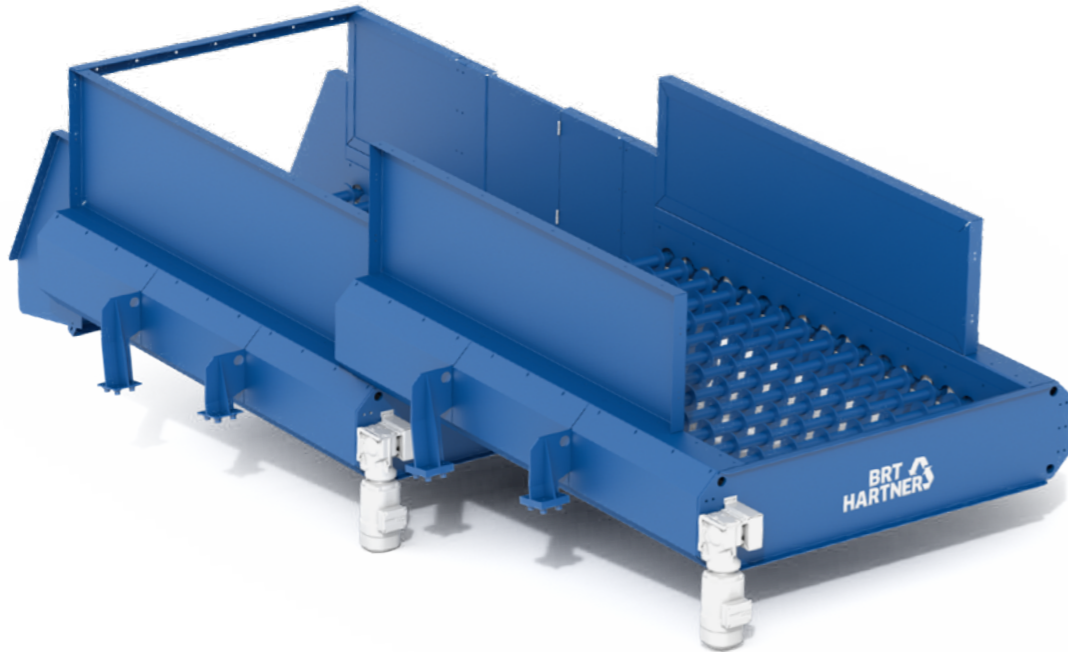

- › Optimal subsequent treatment of mixed paper fraction
- › Efficient screening of disruptive materials and small parts
- › Reasonable price, long service life
- › Additional improvement of performance and quality
- › Loosened up and even material feeding to post-sorting
- › Easy to clean
- › Almost no danger of entangling through long foils or tapes
- › Easy integration into existing sorting plants

Use the BRT HARTNER **SF** Fine screen for post-treatment of the mixed paper fraction. Producing a loose, even stream, the fine screen prepares the material in an optimal way for manual, mechanical or optical sorting. The oversize grain consists mainly of valuable de-inking material.

	SF 40	SF 60	SF 90
Working width	1,700 mm	1,700 mm	1,700 mm
Length	approx. 4,000 mm	approx. 6,000 mm	approx. 9,000 mm
Screen surface	approx. 6.7 m ²	approx. 9.8 m ²	approx. 14.7 m ²
Weight	approx. 2.4 t	approx. 5.0 t	approx. 7.5 t
Mesh size	> 100 mm	> 100 mm	> 100 mm
Cascade	-	500 mm	500 mm
Amount of rotor elements	22	34	51
Amount of discs per element	14	14	14
Power requirement	2.2 kW	4.4 kW	6.6 kW
Throughput waste paper and cardboard	up to 7 t/h	up to 12 t/h	up to 18 t/h

